

Fully Synthetic

Kixx PAO A3/B4

Premium gasoline engine oil providing a first-class driving experience

ACEA A3/B4-16, API SN

5W-30 : MB 229.3, VW 502.00/505.00 APPROVED

5W-40 : MB 229.3, VW 502.00/505.00 RECOMMENDED



DESCRIPTION

Kixx PAO A3/B4 is a premium performance, multi-grade motor oil formulated from PAO and VHVI synthetic base fluids and race-proven additive technology for use in passenger car gasoline engines.

APPLICATIONS

- Gasoline in passenger cars
- Passenger cars where the manufacturers recommend ACEA A3/B4 spec oils
- Portable power equipment where the manufacturer recommends conventional passenger car motor oils

PERFORMANCE STANDARDS

- ACEA A3/B4-16, API SN
- 5W-30 : MB 229.3, VW 502.00/505.00 Approved
- 5W-40 : MB 229.3, VW 502.00/505.00 Recommended

CUSTOMER BENEFITS


- High performance fully synthetic engine oil made from PAO and VHVI base oil
- Meets the latest ACEA specifications A3/B4 and exceeds many global car OEM requirements
- Provides longer oil drain interval and extends oil's life by minimizing viscosity change
- Improves engine durability by reducing sludge formation while maintaining piston cleanliness.

KEY PROPERTIES

SAE Grade	5W-30	5W-40
Density, kg/L @15°C	0.855	0.853
Viscosity, mm ² /s @ 40°C	71.1	87.5
Viscosity, mm ² /s @ 100°C	12.2	14.5
Viscosity Index	171	173
Pour Point °C	-39	-37
Flash Point °C	226	220
Package (Liters)	1,4T,200	1,4T

UNIQUE FEATURES

- Result of Anti-Oxidation Stability test

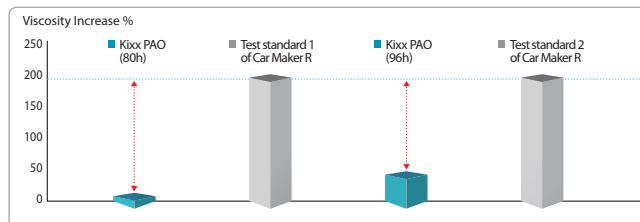

- Result of Cleanliness test for engine pistons from car maker V
- Result of Sludge Control test

